


NOTE: ACCESS POINTS WITHIN LANE CLOSURE SHALL BE CONTROLLED BY FLAGGER(S)

REFER TO TCP 100.01 FOR SIGN SPACING, TAPER LENGTHS AND BUFFER ZONE LENGTHS

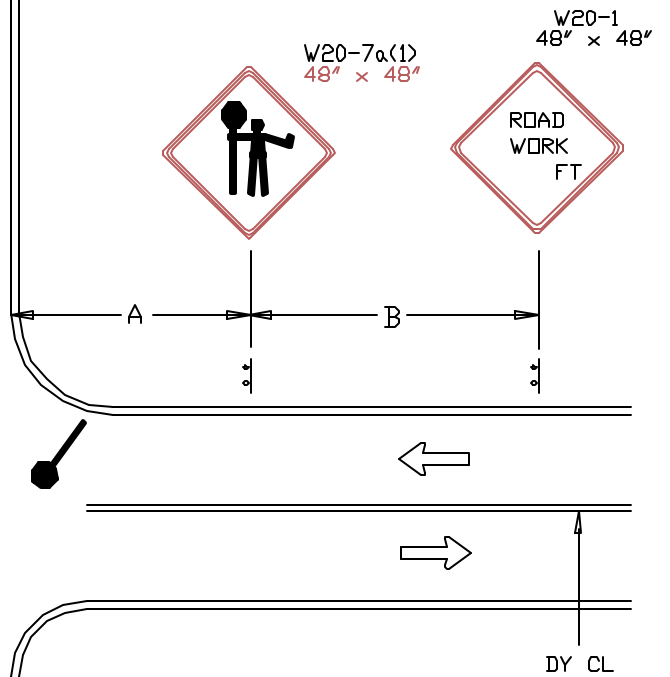

← DIRECTION OF TRAFFIC

— SIGN

▨ WORK SITE

● FLAGGER

○ TRAFFIC DRUMS
OR CONES

S¹=30 FT.


S²=10 FT.

DY CL

WORK AREA

BUFFER

50' TO 100'

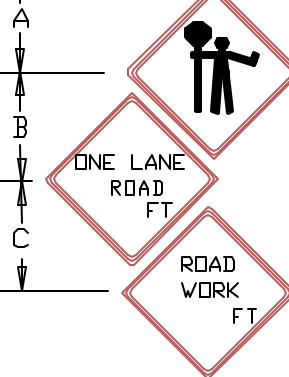

REVISION BY	DATE	APPROVED

DATE	TRAFFIC OPERATIONS SECTION MONTGOMERY COUNTY, MARYLAND	
DES. BY	FLAGGING CONTROL AT 3 - LEG INTERSECTION (2)	
MCDPWT	APPROVED	
DRAWN BY	CHIEF, TRAFFIC OPERATIONS SECTION	
TCLC	STANDARD TCP-105.04	
SCALE	___ OF ___ SHEETS	
NTS		